



Vacuum packaging made easy

BASELINE P300

Chamber machine

420 x 420 x 170 mm


The MULTIVAC chamber machines in the BASELINE series have a robust, durable stainless steel construction as well as an ergonomic and hygienic design. They are particularly easy to operate and have practical standard equipment that can be expanded with additional equipment.

The P300 BASELINE chamber machine has been tested by the German Social Accident Insurance (DGUV) and it carries the GS test seal.

The high degree of usability of the chamber of the P300 makes it suitable for manufacturing packaging of greater sizes. This means it is a particularly economical packaging solution for butchers, restaurants, hotels, direct sellers and farmyard shops as well as for a wide range of consumer goods.

The machine control can be operated intuitively and a large chamber lid enables a clear view of the packaging process. This means that packaging can be conducted simply and efficiently even by inexperienced personnel.

 **MULTIVAC**
BETTER PACKAGING

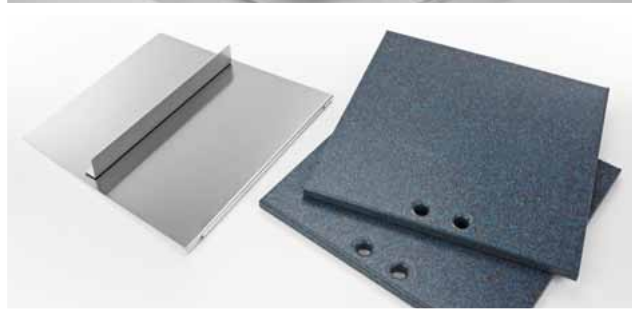

Equipment and technical data

Features

- Housing made of corrosion-resistant stainless steel
- Chamber lid made of transparent acrylic glass (PMMA)
- 2 plastic spacer plates for adjusting the sealing height
- Stainless steel diagonal insert for packaging Liquids
- MULTIVAC vacuum pump 20 m³/h

Chamber dimensions

Chamber width: 440 mm (usable width 420 mm)

Chamber depth: 480 mm (usable depth 420 mm)

Chamber height: 170 mm

Sealing system

- Double-seam separation
(seal seam 3 mm, cut-off seam 1 mm)
- Usable sealing length: 420 mm
- Easy to clean, plug-in sealing bars

Machine control

MULTIVAC machine control MCB01 with the following equipment features:

- Background-lit LCD display
- Vacuum gauge
- 3 memory spaces for user programs
- Quick-stop button for interrupting evacuation and gas flushing processes
- Pump protection function

Machine dimensions

Width: 520 mm

Depth: 640 mm

Height: lid closed: 400 mm

lid open: 745 mm

Electrical connection values

100–115 V 50–60 Hz 0.90 kW 12.5 A

220–240 V 50–60 Hz 0.90 kW 5.6 A

